P/N BJ-2J / BJ-2Z

Marine Audible and Visual Alarm Unit


Unidad de alarma acústica y visual marina

Combined audible and visual alarm unit for the ship's general emergency alarm system and other alarm circuits. When the unit is energized, the horn and the beacon operate together, so the alarm is both heard and seen in noisy machinery spaces, on deck and through the accommodation. The horn and the beacon share one red housing (RAL 3020) with two cable entries at the base. Two models are offered: BJ-2J for AC 220 V and BJ-2Z for DC 24 V.

KEY FEATURES

- Combined horn and visual beacon in a single red (RAL 3020) housing
- Horn and beacon operate together when the unit is energized
- For the ship's general emergency alarm system and other alarm circuits
- Two models: BJ-2J (AC 220 V ±10%) and BJ-2Z (DC 24 V +30% / −25%)
- Sound pressure level 100–110 dB, with 32 selectable IMO A.1021(26) alarm tones
- IP56 ingress protection
- Two cable entries at the base (2 × Φ14 mm)
- Wall-mount enclosure with mounting ears


PRODUCT

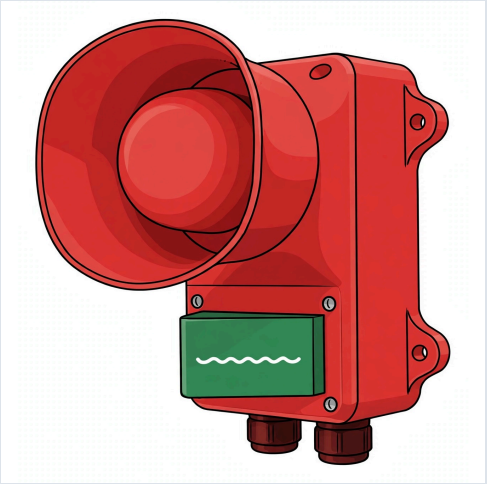

TECHNICAL SPECIFICATIONS

Part numbers	BJ-2J / BJ-2Z
Type	Combined marine audible and visual alarm unit
Application	Ship's general emergency alarm system and other alarm circuits
Power supply, BJ-2J	AC 220 V ±10%
Power supply, BJ-2Z	DC 24 V +30% / −25%
Power	15 W
Sound pressure level	100–110 dB
Alarm tones	32 selectable tones, meeting IMO Res. A.1021(26)
Color	Red (RAL 3020)
Ingress protection	IP56
Cable entrance	2 × Φ14 mm
Mounting	Wall-mount; hole centres 135 × 135 mm
Overall size	Approx. 160 mm W × 250 mm H × 144 mm D

DIMENSIONAL DRAWINGS (MM)

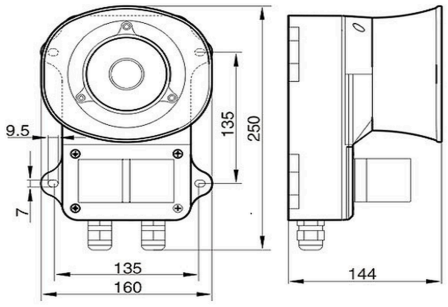

FRONT AND SIDE VIEWS — CATALOGUE DRAWING, FOR REFERENCE ONLY

www.mantto.com
sales@mantto.com
+1 956 627 1082